

SPECIFICATION FEATURE:

STANDARD MODEL FOR RETROFITTING EXISTING FIXTURES

RETROFIT MOUNTING
BASE: E26/GU24

FOR RESIDENTIAL OR COMMERCIAL USE, NO TOOLS
REQUIRED FOR INSTALLATION

IP40

TRIAC DIMMABLE


CCT IS TUNABLE WITH SWITCH ON FIXTURE

8W 4IN

INPUT VOLTAGE	120 V
CRI	>90
LUMEN PER WATT	75 LM/W
AVAILABLE CCT	3000K,4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TEMPERATURE	-40F ~ 104°F
LUMEN	600
MOUNTING OPTIONS	RECESSED HOUSING

15W 6IN

INPUT VOLTAGE	120 V
CRI	>90
LUMEN PER WATT	75 LM/W
AVAILABLE CCT	3000K,4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TEMPERATURE	-40F ~ 104°F
LUMEN	1125
MOUNTING OPTIONS	RECESSED HOUSING

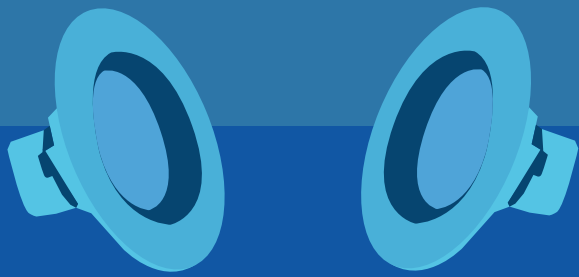

ORDERING OPTIONS:


8W 4IN - 15W 6IN

EXAMPLE: LEDRD 15W 6IN 3CT


LEDRD	15W 6IN	3CT
SERIES LEDRD	RATED WATTAGE & SIZE 8W 4IN 8 WATT, 4 INCH 15W 6IN 15 WATT, 6 INCH	COLOR TEMP 3CT TUNABLE

CCT IS TUNABLE 3000K, 4000K, 5000K

DIMENSIONS:

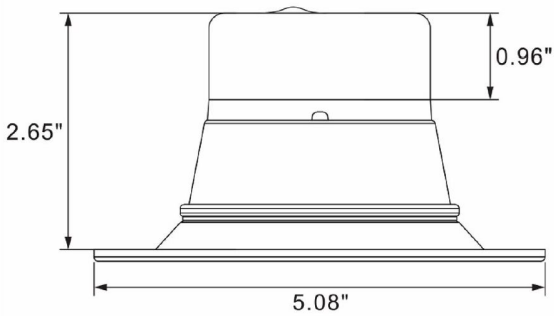

8W 4IN

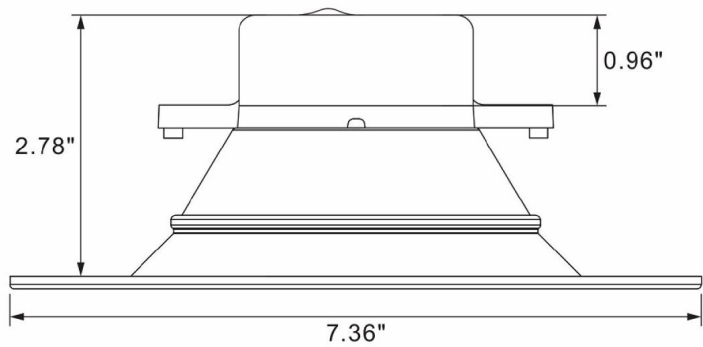

15W 6IN