


PRODUCT DESCRIPTION:

Industrial and commercial applications. For road and area lighting like: parking decks, auto dealerships, high masts, apartments, residential complexes, shopping malls, sporting complexes and fields, educational facilities, streets, roadways, parks, recreational bike paths, and municipal lots.

FEATURES:

- Philips Lumileds 3030 LED chips
- Heavy duty die-cast aluminum housing with quick mount back plate for easy installation
- fully sealed with an IP rating of 65
- High quality tempered glass optics
- Integral secondary heat sink to optimize thermal transfer and maximize performance and life of LED
- Driver is mounted in direct contact with the casting for low operating temperature and long life.
- Polyester powder-coated finish, rust and corrosion proof; stabilized to extreme climate changes without cracking or peeling

DIMENSIONS:

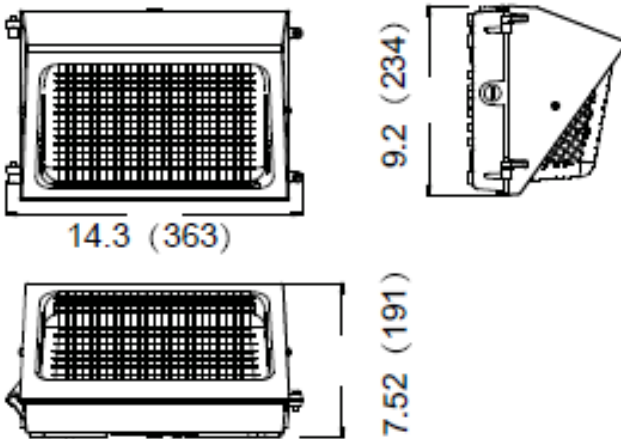

Wall Pack 120W Spec

LOD-WP-120WSAD50K-HLV3



SPECIFICATIONS:

SPECIFICATION	Details
Model	LOD-WP-120WSAD50K-HLV3
Input Wattage (W)	120W
Lumens Delivered (LM)	14,400LM
Efficacy (LM/W)	120LM/W
CRI	70
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	250W – 320W HID
Dimmable	Yes
IP Rating	IP65
Beam Angle	120
Input Voltage	AC120-277V
Power Factor	0.92
Housing	Aluminum
Lens	Frosted/Clear
THD	20%
Mounting	Wall Surface
Weight (LBS)	13.45lbs
Size	14.3" x 9.2" x 7.52"
Certification	DLC, ETL
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Environment	Outdoor
Warranty	5 years limited

OPTIONAL ACCESSORIES:

Cut off shield

CONTROLS:

Photocell optional

Motion sensor optional

