

PRODUCT DESCRIPTION:


Industrial and commercial applications. For road and area lighting like: parking decks, auto dealerships, high masts, apartments, residential complexes, shopping malls, sporting complexes and fields, educational facilities, streets, roadways, parks, recreational bike paths, and municipal lots.

FEATURES:

- Philips Lumileds 3030 LED chips
- Heavy duty die-cast aluminum housing
- fully sealed with an IP rating of 65
- High quality tempered glass optics
- Polyester powder-coated finish, rust and corrosion proof; stabilized to extreme climate changes without cracking or peeling


DIMENSIONS:

DIMENSION Inch(mm)

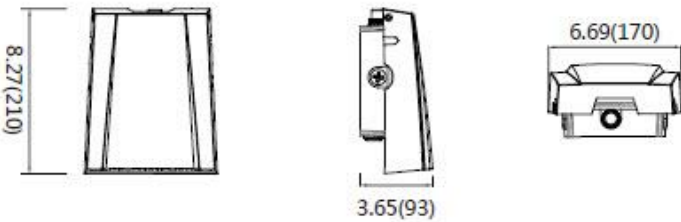

Wall Pack 30W Spec

LOD-AWP-30W-50K-LV-V12

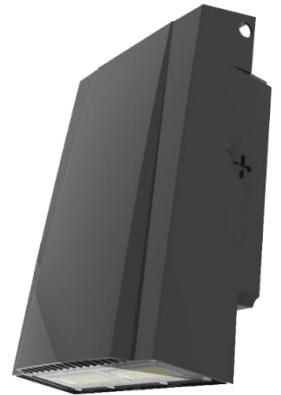

SPECIFICATIONS:

SPECIFICATION	Details
Model	LOD-AWP-30W-50K-LV-V12
Input Wattage (W)	30W
Lumens Delivered (LM)	3,450LM
Efficacy (LM/W)	115LM/W
CRI	70
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	100W
Dimmable	Yes
IP Rating	IP65
Beam Angle	100
Input Voltage	AC120-277V
Power Factor	0.91
Housing	Aluminum
Lens	Frosted
Mounting	Wall Surface
THD	11.4%
Size	8.25" x 6.6" x 3.8"
Certification	DLC, ETL, FCC, CE RoHS, TUV, ISO9001
Operating Temperature	-40°C to 40°C
Environment	Outdoor
Warranty	5 years limited

OPTIONAL ACCESSORIES



10KV SPD
120-277V



BUTTON STYLE
PHOTOCELL
120-277V



DIMMABLE MOTION
SENSOR
120-277V

INSTALLATION

