



SPECIFICATION FEATURE:

REPLACES 250-400W MH OR HID HIGH BAY FIXTURES

INCREASE ENERGY SAVINGS WITH BI-LEVEL MOTION SENSOR

SUITABLE FOR COMMERCIAL, RETAIL AND INSTITUTIONAL APPLICATIONS INCLUDING GYMNASIUMS, FACTORIES AND WAREHOUSES

140 WATT

200 WATT

INPUT VOLTAGE	110-277VAC
CRI	> 72
LUMEN PER WATT	> 135 LM/W
AVAILABLE CCT	5000K
LIFE SPAN	50,000 HOURS
OPERATION TYPE	- 40F - 131F
LUMEN	18,900
MOUNTING OPTIONS	CEILING MOUNT, CHAIN SUSPENSION

INPUT VOLTAGE	110-277VAC
CRI	> 72
LUMEN PER WATT	> 130 LM/W
AVAILABLE CCT	5000K
LIFE SPAN	50,000 HOURS
OPERATION TYPE	- 40F - 131F
LUMEN	26,000
MOUNTING OPTIONS	CEILING MOUNT, CHAIN SUSPENSION



ORDERING OPTIONS:




140W - 200W

LED 3MHB 200W 50K 27V ML

LED3MHB	200W	50K	27V	[BLANK]	[BLANK]	ML
SERIES LED3MHB	RATED WATTAGE 140W 140 WATT 200W 200 WATT	COLOR TEMP 50K 5000 KELVIN	INPUT VOLTAGE 27V 110 - 277 VAC 48V 347 - 480 VAC	OPTIONS BLANK -NO MOTION SENSOR MS -MOTION SENSOR	FINISHING BLANK DARK BRONZE WH WHITE BK BLACK	BEAM ANGLE ML 90 DEGREE LENS WL 120 DEGREE LENS

PLEASE CALL FOR LEAD TIME FOR WHITE AND BLACK FINISHING

DIMENSIONS:

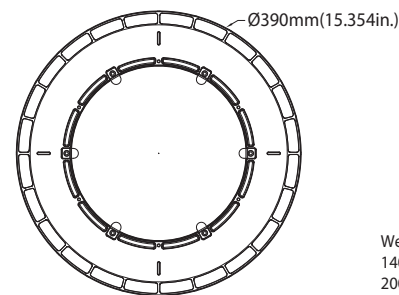


Weight
140W: 12.56lb
200W: 13.58lb



PHOTOMETRICS:

120 DEGREE LENS

Luminous Intensity Distribution Curve

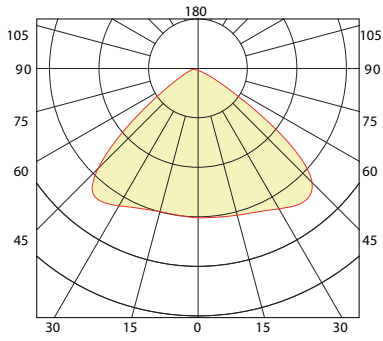

90 DEGREE LENS

Luminous Intensity Distribution Curve

