

SPECIFICATION FEATURE:

ALUMINUM HOUSING WITH UV RESISTANT POWDER COAT FINISH

MULTIPLE MOUNTING OPTIONS

UL WET LOCATION LISTED AND DLC QUALIFIED

SURGE PROTECTION AVAILABLE

RUGGED DIE-CAST ALUMINUM HOUSING



70 W


110 W

200 W

INPUT VOLTAGE	110-277VAC
CRI	> 80
LUMEN PER WATT	> 114 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TYPE	- 40F - 104F
LUMEN	7980
MOUNTING OPTIONS	SLIPFITTER, TRUNNION

INPUT VOLTAGE	110-277VAC
CRI	> 80
LUMEN PER WATT	> 114 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TYPE	- 40F - 104F
LUMEN	12,540
MOUNTING OPTIONS	SLIPFITTER, TRUNNION

INPUT VOLTAGE	110-277VAC
CRI	> 72
LUMEN PER WATT	> 120 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TYPE	- 40F - 104F
LUMEN	24,000
MOUNTING OPTIONS	SLIPFITTER, TRUNNION



ORDERING OPTIONS:

EXAMPLE : LEDFL 70W 50K 277V -SP

70W - 110W

LEDFL	70W	50K	277V	-[BLANK]	-SP	-[BLANK]
SERIES LEDFL	RATED WATTAGE 70W 70 WATT 110W 110 WATT	COLOR TEMP 40K 4000KELVIN 50K 5000KELVIN	INPUT VOLTAGE BLANK 110 - 277 VAC	FINISHING BLANK DARK BRONZE WH WHITE	MOUNTING -SP -SLIPFITTER MOUNTING -TM -TRUNNION MOUNTING	OPTIONS BLANK -NO PHOTOCELL -PC -TWIST LOCK PHOTOCELL


EXAMPLE : LEDFL 200W 50K 277V -SP

200W


LEDFL	200W	50K	277V	-[BLANK]	-SP	-[BLANK]
SERIES LEDFL	RATED WATTAGE 200W 200 WATT	COLOR TEMP 40K 4000KELVIN 50K 5000KELVIN	INPUT VOLTAGE BLANK 110 - 277 VAC HV -480VAC	FINISHING BLANK DARK BRONZE WH WHITE	MOUNTING -SP -SLIPFITTER MOUNTING -TM -TRUNNION MOUNTING	OPTIONS BLANK -NO PHOTOCELL -PC -TWIST LOCK PHOTOCELL


DIMENSIONS:

70W - 110W

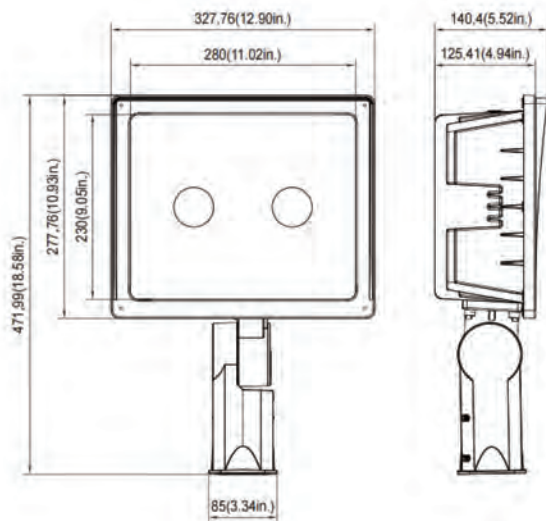



200W

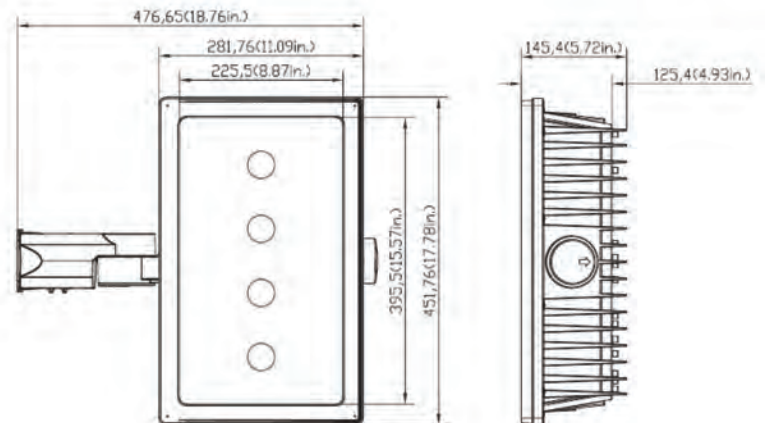





PHOTOMETRIC:



70W

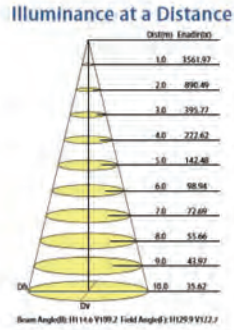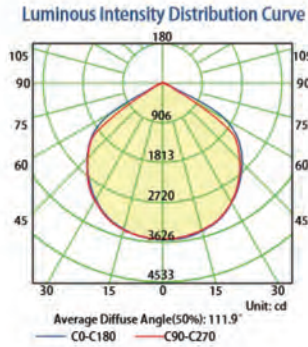


110W

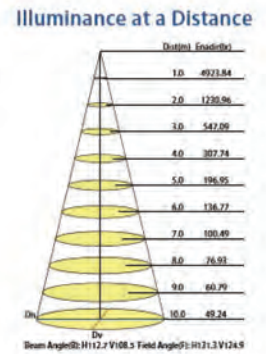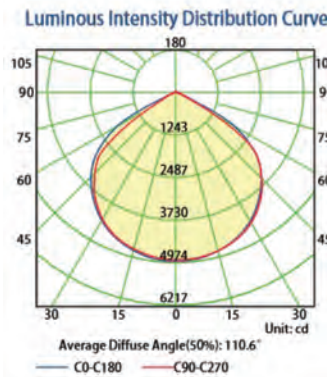


200W

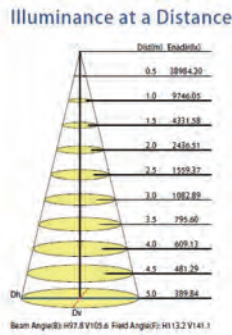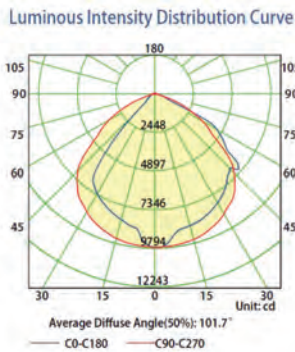

INSTALLATION:

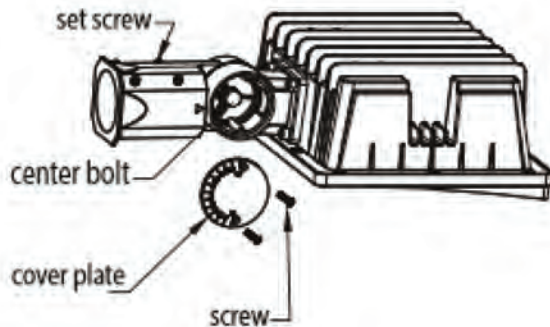

Slipfitter Mounting

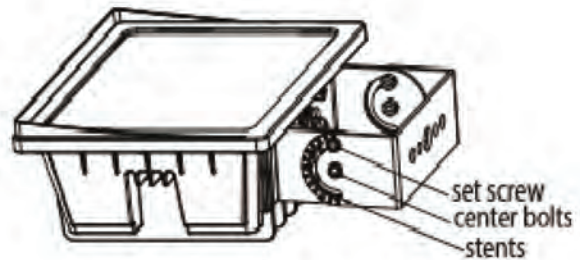

Trunnion Mounting