



## SPECIFICATION FEATURE:

**WIDELY USED FOR INDOOR COMMERCIAL  
GENERAL LIGHTING PURPOSES**

**DESIGNED TO DISTRIBUTE AN EVEN DISTRI-  
BUTION OF LIGHT**

**REPLACES RECESSED OR SURFACE MOUNT  
FLORESCENT FIXTURES**

**2X2  
40W**

INPUT VOLTAGE	110 - 277 VAC
CRI	>80
LUMEN PER WATT	126 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TEMPERATURE	-2°F ~ 113°F
LUMEN	5,040
MOUNTING OPTIONS	SURFACE MOUNT, SUSPENDENT MOUNT

**2X4  
50W - 75W**

INPUT VOLTAGE	110 - 277 VAC
CRI	>80
LUMEN PER WATT	126 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,000 HOURS
OPERATION TEMPERATURE	-2°F ~ 113°F
LUMEN	6,300 - 9,450
MOUNTING OPTIONS	SURFACE MOUNT, SUSPENDENT MOUNT

## ORDERING OPTIONS:

### 2X2

EXAMPLE: PL2X2 40W 40K DIM

PL2X2	40W	40K	[BLANK]	DIM	[BLANK]
SERIES PL2X2	RATED WATTAGE 40W 40 WATT	COLOR TEMP 40K 4000 KELVIN 50K 5000 KELVIN	INPUT VOLTAGE BLANK 110 - 277 VAC	OPTIONS DIM DIMMABLE	OPTIONS BLANK WITHOUT EMERGENCY BATTERY -EB EMERGENCY BATTERY


### 2X4

EXAMPLE: PL2X4 50W 40K DIM


PL2X4	50W	40K	[BLANK]	DIM	[BLANK]
SERIES PL2X4	RATED WATTAGE 50W 50 WATT 75W 75 WATT	COLOR TEMP 40K 4000 KELVIN 50K 5000 KELVIN	INPUT VOLTAGE BLANK 110 - 277 VAC	OPTIONS DIM DIMMABLE	OPTIONS BLANK WITHOUT EMERGENCY BATTERY -EB EMERGENCY BATTERY

## DIMENSIONS:

### 2X2


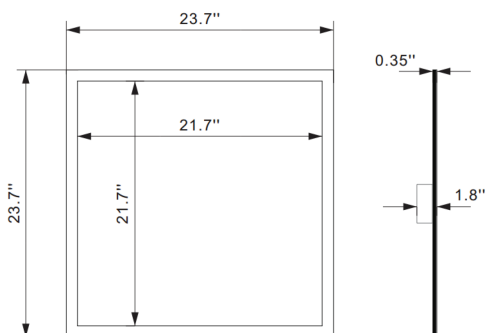


### 2X4

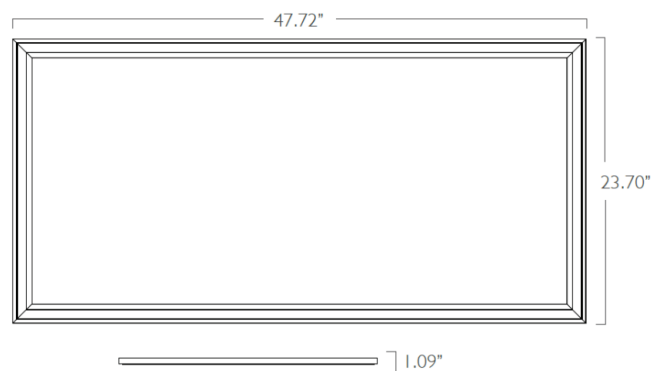


**PHOTOMETRIC:**

**2X2**

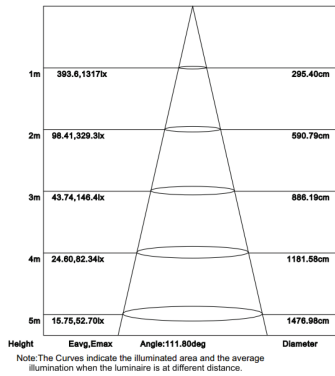

**2X4**

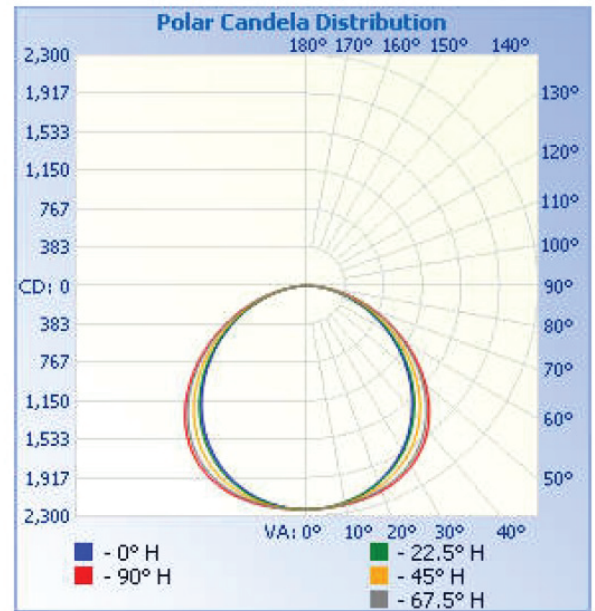

**MOUNT OPTIONS:**

**RECESED WITH WIRE**

